

PITS-100A

Primary Injection Test Set



FEATURES

- Parameters : Time (sec) & Amps
- Ideal For Current Injector, MCBs, Relay, and CT Testing
- Print All Test Results
- Adjustable Load Current up-to 100A
- Button For Print Every 0.2sec Data
- Test Result Shows RMS Amps and Total Time (sec)
- Fast & Stable Result
- RS-232 Port For Software Interface



APPLICATION



MCBs



Cts




Rrelays



EMBUILT TECHNOLOGIES

Primary Injection Test Set

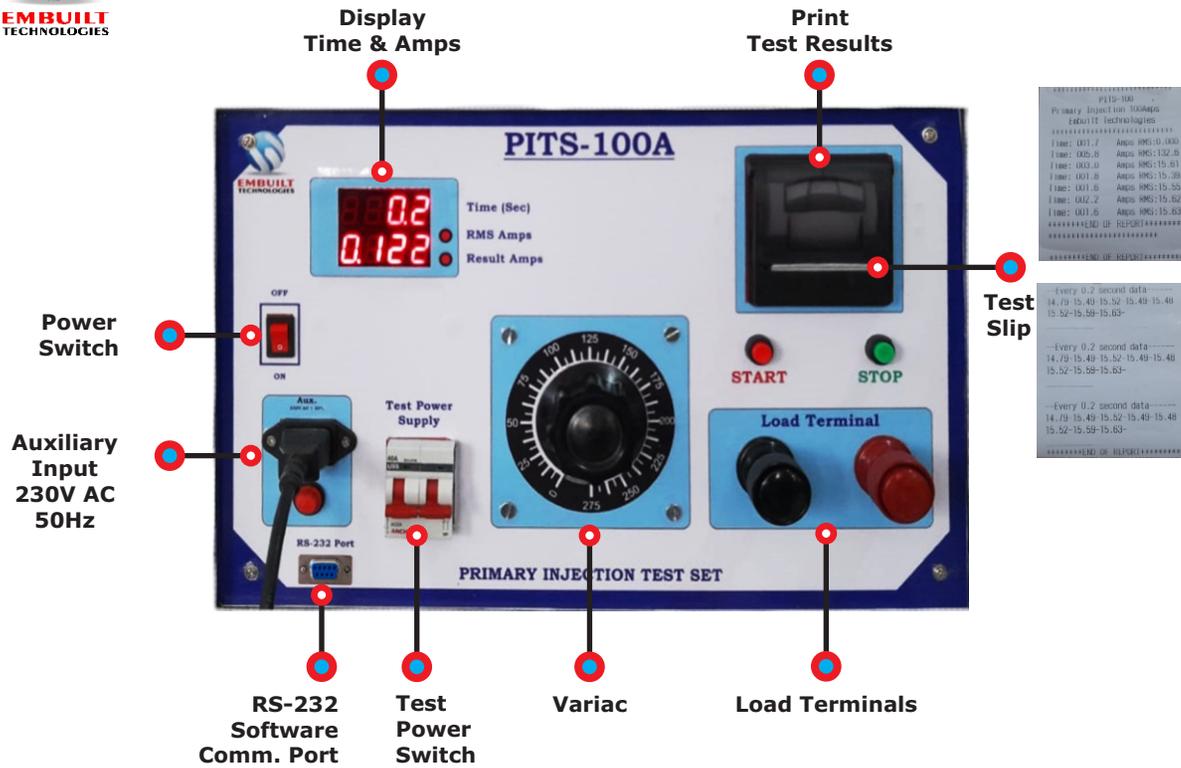


TECHNICAL SPECIFICATION


Auxiliary Power	220 - 240 V, 50 Hz
Load Current	up-to 100Amps
Load Voltage	3.0V (2.5V on max Amps)
Burden	up-to 300VA
Resolution	0.1 Amps 0.1 Sec.
Accuracy	0.1 Apms 10 mSec.
Duty Cycle	15min ON, 20min OFF
Protection & Safety	Input Isolator
Display	Seven Segment LED
Measurement	Time(sec) & RMS Amps
Software Communication	RS-232 Port



DIMENSION

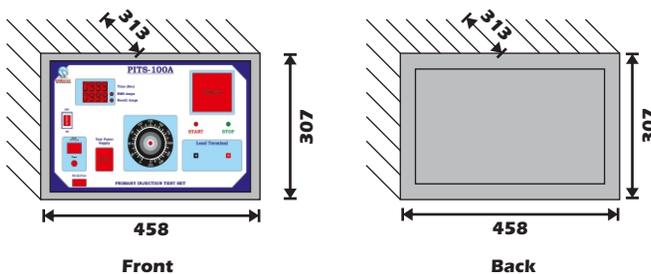

SOFTWARE

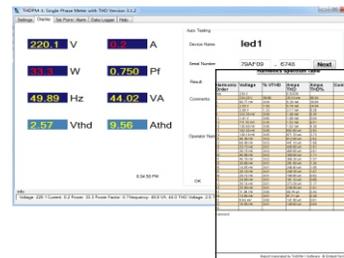

E-mail : info@embuilt.com, embuilt.jaipur@gmail.com

Website : <http://www.embuilt.com>



EMBUILT TECHNOLOGIES

**Developed & Manufactured By :
EMBUILT TECHNOLOGIES**

Office: A-404, Vaishali Nagar,
Jaipur-302021, Rajasthan, INDIA
Mob. : +91-7524853539

Factory: H-54, RIICO Industrial Area,
Bindayaka, Jaipur-302012,
Rajasthan, INDIA

Rel: 17-02-2022